


PLOFLON Teflon film, self-adhesive, format goods

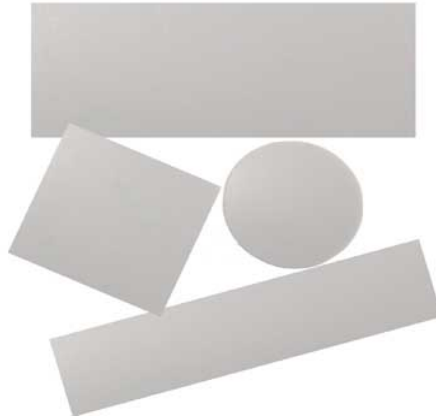

| Product | Product category | Coating |
|---------|------------------|---------|
|---------|------------------|---------|

PLOFLON PTFE GLASS FABRIC
Self adhesive

Premium Serie

Silicone PSA

PLOFLON Premium Series PTFE skived film with one side coated with a pressure sensitive silicone adhesive.

Good strength, abrasion resistance and the low friction properties of Skived PTFE film make it a prime choice for mechanical applications from lining guide rails to wrapping wire harnesses.

For mechanical applications and all-purpose use, PTFE tape offers superior low friction and non-stick properties.

Please indicate required liner to your order one of below liner ;

1. Corrugated Yellow Liner
2. Flat Transparent Liner

| Properties | Value | Unit |
|--|--|---------|
| Standard dimensions Please ask for other dimensions | 250x 1000 / 280x1000 / 300x1000 400x1000 / 500x1000 | mm |
| Backing thickness | 0,240 / 0,530 | mm |
| Total thickness | 0,300 / 0,600 | mm |
| Adhesion | 6,30 | N/cm |
| Temperature resistance | -73° / +260° | Celsius |

Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum. Weight Tolerance $g/m^2 = \pm 5\%$

All technical data are based on average values. The se values are not intended for use in preparing specifications. Technical information contained here in are based on test results PLOFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.

All data is subject to change without notice.